







Febe

suspended/zwieszany



code kod	diameter średnica	luminaire nominal power znamionowa moc oprawy	luminous flux strumień z oprawy	luminaire efficacy skuteczność oprawy	UGR
6047.0KELC	600mm	10W	916lm	92lm/W	<22
6050.0KELC	600mm	18W	1833lm	102lm/W	<22
6048.0KELC	980mm	14W	1375lm	98lm/W	<22
6051.0KELC	980mm	26W	2749lm	106lm/W	<22
6049.0KELC	1200mm	18W	1833lm	102lm/W	<22
6052.0KELC	1200mm	34W	3666lm	108lm/W	<22

suspension cables certified for
resistance to vibrations and oscillations
zawiesia z certyfikacją odporności na
drgania i wibracje

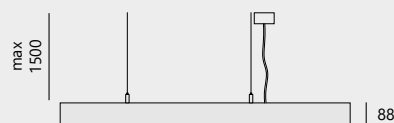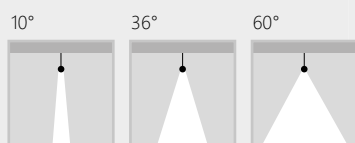

K	colour temperature temperatura barwowa	E	electronics elektronika	L	optics optyka	C	finishes wykończenia
3	3000K	0	on/off	10	10°	03	white biały
4	4000K	D	DALI	36	36°	06	grey szary
		C	Casambi	60	60°	70	anthracite antracyt
						05	black czarny
additional accessories akcesoria dodatkowe							
		code/kod		60.01C		60.02C	
				ø140 rose for ø600 luminaires przysufitka ø140 dla opraw ø600		ø200 rose for ø980, ø1200 luminaires przysufitka ø200 dla opraw ø980, ø1200	