

MEDIO MICROPRISM LINE MODULE TUNABLE WHITE



Allgemeine Daten:


Schutzart IP:	IP20
Betriebs- temperatur:	von -20° bis +35°
Lebensdauer L80B10:	100 000h

Elektrische Daten:

Nennspannung:	230-240V AC
Nenn- frequenz:	50-60Hz
Schutzklasse:	I
Lichtquelle enthalten:	ja
Dimmung:	DALI, Casambi

Lichtdaten:

Lichtquelle:	LED
--------------	-----



Referenzen



Osiedle Kwartal Uniwersytecki 2,
Danzig, Polen



Centrum Badawczo Rozwojowe PID



Uniwersytet Techniczny w Kownie,
biblioteka na terenie kampusu, Kowno,
Litauen



Publiczne Przedszkole "Kido".
Aleksandrowo Lodzer, Polen



Mauzoleum Martyrologii Wsi Polskich
w Michniewie




iSpot, Posen, Polen



FLSmidth MAAG Gear, Elbing, Polen



Firma Goodmills, Stradunia, Polen

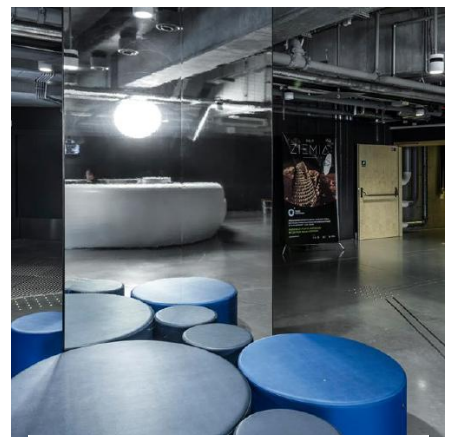

Centrum Nauk Kopernik, Warschau,
Polen

Art.-Nr.	Leuchtenlichtstrom	Leistung	Effizienz	Abmessungen	UGR
105.07 04 TWE	3276lm	29W	113lm /W	L=1120mm	<24
105.07 06 TWE	4914lm	42W	117lm /W	L=1680mm	<24
105.07 08 TWE	6552lm	56W	117lm /W	L=2240mm	<24
105.07 10 TWE	8190lm	69W	119lm /W	L=2800mm	<24