

ELIZA

□ □ □ □

General data:

Mounting type:	foundation
Luminaire body:	aluminum
Operating temperature range:	from -20°C to +45°C
Lifetime L80B10:	100 000h
Ingress protection IP:	IP65
Impact protection IK:	IK08

Optical data:


Light distribution:	symmetrical, street, park
Contains light source:	yes
Optical system:	lens
Material:	PMMA
Protection class:	I

Lighting data:

Colour rendering index:	CRI>70
Type of source:	LED

Electrical data:







Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
Dimming:	ON-OFF
supply box:	inside the luminaire
wiring:	through
tolerance of luminous flux:	SDCM<3
colour tolerance SDCM:	+/-10%
light emission:	direct
connection:	connector in a box

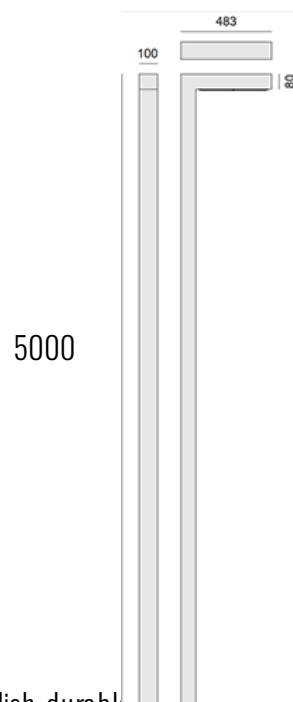

The economical outdoor light pole Eliza is the perfect choice for those seeking a stylish, durable, and cost-effective lighting solution. It is suitable for both private gardens and commercial spaces, enhancing the aesthetics and functionality of the illuminated areas.

Photometric body

□ □ □ □ □



C - colour

L - lenses to choose:

02 - asymmetric

floodlighting

distribution

03 - street lighting

distribution

04 - park lighting

distribution



white
03

grey
06

anthracite
70

black
05

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	Dimensions
9522.530LC	4 625lm	33W	14 0 lm/W	3000K	5000mm
9522.540LC	4 818lm	33W	14 6 lm/W	4 000K	5000mm

Accessories

foot cover

catalogue number 90.49C



foundation

catalogue number 1300.900

