


CONNECTION DIAGRAMS FOR VERSIONS WITH EXTERNAL LED DRIVER SCHEMATY PODŁĄCZENIA DLA WERSJI Z ZEWNĘTRZNYM ZASILACZEM LED


PISTON 140 LV / NAIK 140 LV
8W 350mA

max. distance 50m (2x2.5mm2 cable)

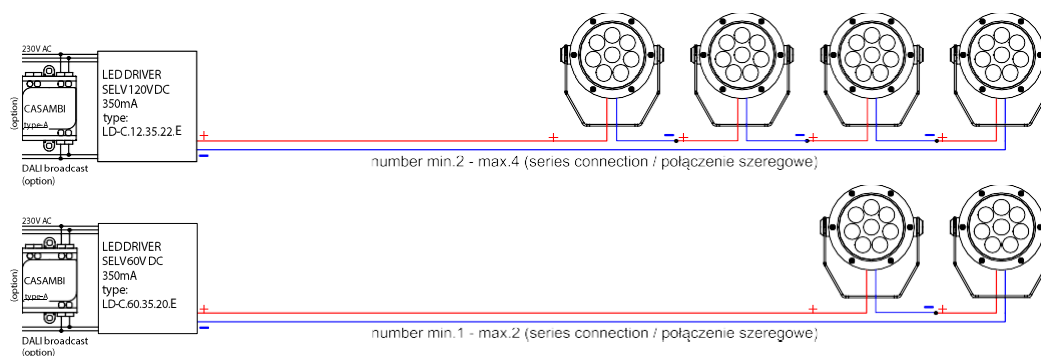


PISTON 140 LV / NAIK 140 LV
16W 700mA

max. distance 50m (2x2.5mm2 cable)

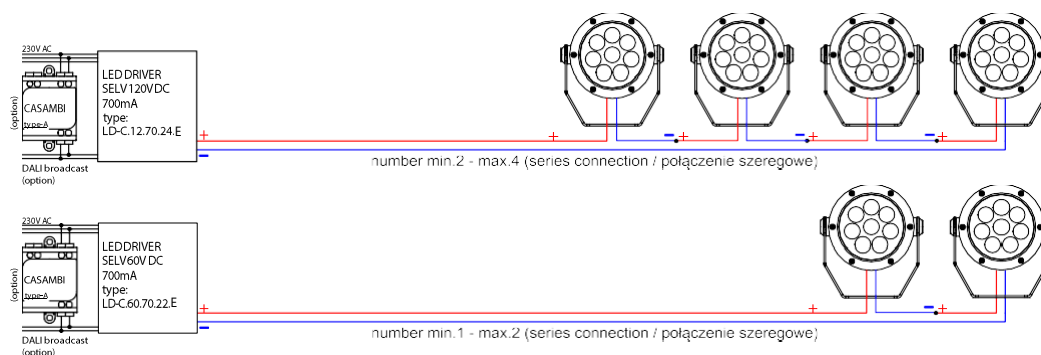

PISTON 140 LV
24W 1050mA

max. distance 50m (2x2.5mm2 cable)

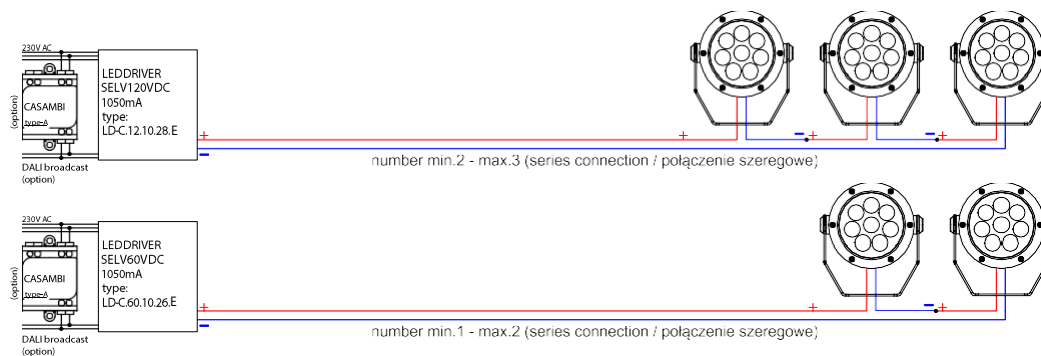

E- LED driver | zasilacz LED



options | na zapytanie:
for CASAMBI use the DALI version LED DRIVER
dla CASAMBI do zastosowania zasilacz LED w wersji DALI
IP20 power supplies | zasilacze IP20