



Bri Wall Sta Microprismatic Diffuser



code kod	length długość	luminaire nominal power znamionowa moc oprawy	luminous flux strumień z oprawy	luminaire efficacy skuteczność oprawy	UGR
low power					
7008.02KEC	566mm	11W	1229lm	112lm/W	<22
7008.03KEC	846mm	16W	1842lm	119lm/W	<22
7008.04KEC	1126mm	20W	2456lm	123lm/W	<22
7008.05KEC	1406mm	25W	3071lm	125lm/W	<22
7008.06KEC	1686mm	29W	3685lm	127lm/W	<22
7008.07KEC	1967mm	34W	4299lm	128lm/W	<22
7008.08KEC	2247mm	38W	4913lm	129lm/W	<22
7008.09KEC	2527mm	43W	5527lm	130lm/W	<22
7008.10KEC	2807mm	47W	6141lm	131lm/W	<22
7008.11KEC	3087mm	52W	6755lm	131lm/W	<22
7008.12KEC	3367mm	56W	7369lm	132lm/W	<22
7008.13KEC	3648mm	61W	7983lm	132lm/W	<22
7008.14KEC	3928mm	65W	8597lm	132lm/W	<22
high power					
7010.02KEC	566mm	15W	1693lm	110lm/W	<24
7010.03KEC	846mm	22W	2540lm	115lm/W	<24
7010.04KEC	1126mm	29W	3387lm	118lm/W	<24
7010.05KEC	1406mm	36W	4233lm	119lm/W	<24
7010.06KEC	1686mm	42W	5080lm	120lm/W	<24
7010.07KEC	1967mm	49W	5926lm	121lm/W	<24
7010.08KEC	2247mm	56W	6773lm	122lm/W	<24
7010.09KEC	2527mm	62W	7620lm	122lm/W	<24
7010.10KEC	2807mm	69W	8466lm	123lm/W	<24
7010.11KEC	3087mm	76W	9313lm	123lm/W	<24
7010.12KEC	3367mm	82W	10160lm	123lm/W	<24
7010.13KEC	3648mm	89W	11006lm	124lm/W	<24
7010.14KEC	3928mm	96W	11853lm	124lm/W	<24

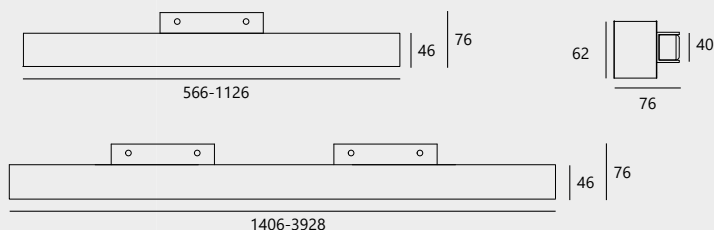

K colour temperature
temperatura barwowa

E electronics
elektronika

C finishes
wykończenia

3 3000K
4 4000K

0 on/off
D DALI
C Casambi

03	06	70	05
white biały	grey szary	anthracite antracyt	black czarny